

# Lead-acid battolysers for hydrogen cooking: a comparison with electric cooking for sub-Saharan Africa

Timothy Hutty<sup>a</sup>, Joseph Hammond<sup>a</sup>, Diarmid Roberts<sup>a</sup>, John Barton<sup>b</sup>, Jonathan Wilson<sup>b</sup>, Dani Strickland<sup>b</sup>, Solomon Brown<sup>a\*</sup>

<sup>a</sup>Department of Chemical and Biological Engineering, University of Sheffield, UK  
<sup>b</sup>CREST, Loughborough University, Loughborough, UK,

## Abstract

A battolyser combines the function of battery and electrolyser in one device, i.e. it provides both electrical energy storage and a means to produce hydrogen. A battolyser with lead-acid chemistry has recently been proposed, and this has potential as a particularly low-cost solution. Here, the battolyser is considered for the production of hydrogen as a cooking fuel (“hCooking”) in sub-Saharan Africa, a region where cooking typically employs polluting fuels (firewood and charcoal). The more conventional approach for decarbonisation of cooking is the introduction of electric cookers (e.g. hotplate, induction hob, pressure cooker) which can be powered by PV and possibly battery storage; accordingly these electric cooking (“eCooking”) systems are considered as the competing decarbonised technology. Multi-objective optimisation is used to design both battolyser and eCooking systems for a notional off-grid community, with solar PV as the main energy source. Objectives are the minimisation of net present cost and lifetime greenhouse gas emissions, and Pareto frontiers are produced to show the play-off between these. Results show that a battolyser system could eliminate 95.6% of CO<sub>2</sub> emissions when compared with a baseline using charcoal, at an annualised cost of \$507 per household, over a system lifetime of 20 years. However, eCooking systems appear superior to the battolyser, with the cleanest battery + eCook system achieving 95.8% emissions reduction at annualised cost \$422 / household. More generally, hCooking systems are nearly always Pareto dominated by eCooking systems, even under a realistic range of sensitivity scenarios. This result is due to the inherently higher energy intensity of cooking over a flame compared to the eCooking options. Priorities to make the battolyser a more viable solution include extending its lifetime as far as possible, cheaper PV systems, and improved hydrogen burner efficiencies. We also show that eCooking together with some continued use of charcoal may be the cheapest possible cooking solution, whilst simultaneously curtailing 60% of lifetime greenhouse gas emissions.

*Keywords: battolyser; hydrogen cooking hCooking; electric cooking eCooking; sub-Saharan Africa; solar PV*

\*Corresponding author.  
E-mail address: s.f.brown@sheffield.ac.uk

## Nomenclature

### Abbreviations.

DHI	Diffuse horizontal irradiance
DNI	Direct normal irradiance
eCooking	Electric cooking
EPC	Electric pressure cooker
GHG	Greenhouse gas
GHI	Global horizontal irradiance
hCooking	Hydrogen cooking
LCA	Life cycle assessment
LHV	Lower heating value
LPG	Liquid petroleum gas
NPC	Net present cost
PV	Photovoltaic generation
SSA	sub-Saharan Africa
USD	U.S. dollar

## 32 1. Introduction

### 33 1.1 Decarbonisation of cooking for sub-Saharan Africa

34 Cooking in sub-Saharan Africa (SSA) often employs biomass (firewood, charcoal, dung), kerosene or  
35 coal. The smoke from these fuels is detrimental to health, with one estimate suggesting that 500 000  
36 premature deaths are caused annually in SSA. Furthermore, the biomass fuels are not necessarily  
37 sustainably produced, contributing to greenhouse gas (GHG) emissions and deforestation [1]. There are  
38 various options for cleaner cooking technologies, of which the front-runners are arguably electric  
39 cooking (eCooking) and liquefied petroleum gas (LPG); eCooking devices include hotplate, induction  
40 hob, slow cooker and electric pressure cooker (EPC) [2], [3]. Less widespread approaches include solar  
41 cookers and biogas. This present work, meanwhile, considers an alternative approach to cleaner  
42 cooking, using hydrogen (“hCooking”); the environmental and economic merits of hCooking will be  
43 compared to the more established eCooking technology. For hCooking, a battolyser is considered for  
44 hydrogen production, functioning as both electrolyser and battery (see Section 1.2).

45 Previous work on cleaner cooking technologies has mainly focused on eCooking, with hCooking  
46 receiving much less consideration. The literature is generally optimistic that eCooking is cost-  
47 competitive with LPG [2], [4], [5]; cost-competitiveness with wood or charcoal appears to be a possibility,  
48 although less clearcut.

49 One of the widest-ranging analyses of the transition to clean cooking for SSA was carried out by Leach  
50 et al [2] as part of the MECS (Modern Energy Cooking Services) programme [6]. This work  
51 encompassed modelling of load profiles, network analysis, life cycle assessment (LCA) and cost-benefit  
52 analysis, and the methodology was applied to three case studies. For an ‘on-grid’ location in Zambia,  
53 cheap grid electricity tariffs meant that eCooking could achieve marked savings on bills. For a pre-  
54 existing minigrid in Tanzania, eCooking was competitive with LPG on cost, and also with charcoal  
55 under some circumstances. For an off-grid location in Kenya, economics for eCooking were more  
56 challenging; however a hybrid system with a mixture of eCooking and LPG showed promise. An  
57 ESMAP report [7] reached similar conclusions, predicting that eCooking is cost-competitive with  
58 charcoal in a variety of circumstances, or would become so by 2025. eCooking in the context of a PV  
59 microgrid was also considered by Lombardi et al [5], and found to be cost-competitive with other  
60 options including LPG. Van Buskirk et al [8] considered solar powered eCooking in SSA, focusing on  
61 direct-use DC solar and lithium titanate batteries, with a view to evaluating competitiveness with wood as  
62 a fuel; both systems showed a strong possibility to be cost-competitive with wood in terms of marginal  
63 levelized cost of energy. Antonanzas-Torres et al [4] considered eCooking powered by a low-powered  
64 home PV system, with results suggesting that eCooking was within the competitive price range with  
65 wood and charcoal, although to ensure reliability it should be combined with the traditional fuels,  
66 particularly in larger households. Batchelor et al [9] employed multi-criteria decision analysis to  
67 identify the nations most ripe for a transition to eCook; Southern and Eastern Africa were identified as  
68 the key regions, with Zambia, Kenya and Tanzania offering the highest viability of all.

69 The motivation to consider hCooking stems from hydrogen’s low storage price per kWh compared to  
70 batteries, allowing for longer term storage [10]–[12]. Hydrogen may also feel more familiar to those  
71 who previously cooked on gas or liquid fuels. Nonetheless, hCooking has received little attention in the  
72 literature. Schöne et al [13] considered the potential of hydrogen for cooking in remote African  
73 communities, either used directly for hCooking, or with electrolyser + fuel cell as an electrical energy  
74 store to support eCooking. Direct use of hydrogen was found to be the more economical option in terms  
75 of annualised value. Topriska et al [14] considered solar hCooking systems to supply cooking demand  
76 in Ghana, Jamaica and Indonesia; systems were sized with detailed attention to analysis of the solar


77 resource, but not costed. A challenge for hCooking is that cooking on a flame tends to be inherently  
78 more energy intensive than eCooking options; i.e. more energy is typically required to prepare a given  
79 meal. Hydrogen likely has a similar energy demand to LPG, which is very roughly double that of  
80 eCooking – but is still considerably more efficient than charcoal or firewood [2], [7], [14]. In this work,  
81 hCooking is considered as a possible rival to eCooking, with a battolyser used to produce hydrogen  
82 from solar power.

83 Clean cooking technologies can face barriers to adoption. Studies carried out in Zambia [15]  
84 demonstrate that whilst electricity is the aspirational cooking fuel in the country, charcoal use is also  
85 ‘deeply embedded’. Poor reliability of the electrical grid has in the past caused many adopters of  
86 eCooking to revert to charcoal. Additionally, there are sometimes perceptions that cleaner cooking  
87 technologies are more costly than is the case [16], and safety concerns are cited as obstacles to adoption  
88 of both LPG and EPCs [15]. On the other hand, fuel stacking of eCook with charcoal is proving to be  
89 popular in Zambia, and cooking styles appear compatible with the newer technologies [15].

90 The environmental impact of cooking technologies has seen various treatments. For instance, in [2], [4]  
91 full-scale impact assessment is carried out to make a discrete comparison between the status-quo and  
92 the eCooking alternative, whilst in [13], [14] a more limited consideration of operational emissions is  
93 included, and in [8] environmental degradation is accounted via a cost factor. In some other sources [5],  
94 [9] environmental benefits for eCook are assumed but not quantified. In contrast with previous  
95 literature, this work frames emissions curtailment as one objective of a multi-objective optimisation,  
96 together with cost. This approach enables understanding the play-off between cost and environmental  
97 benefit, and can highlight ‘compromise’ system designs which achieve less than 100% emissions  
98 curtailment, but at cheaper cost.

99

## 100 1.2 Battolysers

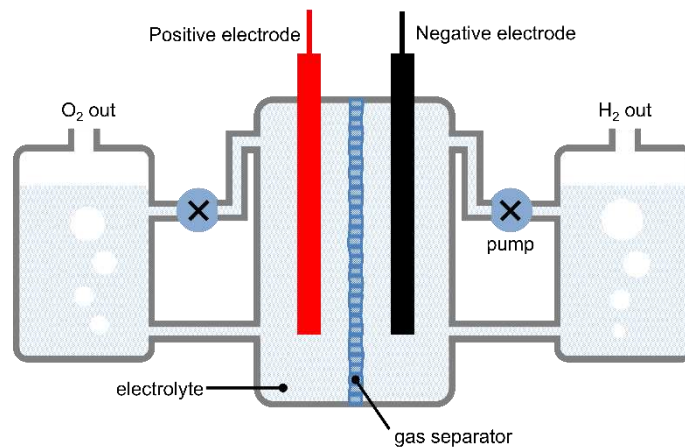

**Figure 1.** High level schematic of lead-acid battolyser. Adapted from [17].

101

102 A battolyser combines the function of both battery and electrolyser in one device. The concept is  
103 relatively recent, with the first publication on the subject in 2017 [18]. The battolyser can absorb or  
104 produce electricity in the manner of a battery; but when it approaches a fully charged state, it begins to  
105 operate as an electrolyser, and hydrogen production commences. Thus, the battolyser can realise both  
106 short-term and long-term energy storage with one device. Figure 1 shows a simple schematic of a  
107 battolyser. Battolysers require the electrolyte to circulate, since gas bubbles would otherwise impair

108 electrolyte conductivity; consequently they resemble flow batteries [17], [19]. A gas separator ensures  
109 that hydrogen and oxygen products do not mix.

110 The original battolyser concept used a nickel-iron chemistry [18]. Recent work has investigated the  
111 potential of a lead-acid battolyser, incentivised by the rising cost of nickel driven by increasing demand  
112 for conventional batteries [19]; the lead-acid chemistry could provide for a cheaper battolyser,  
113 appropriate for a wider range of customers. Furthermore, since lead-acid batteries are such an  
114 established technology due to the application in vehicles, the lead-acid battolyser has a possible  
115 advantage in terms of supply chains, manufacturing and even recycling [19]. With the technology still  
116 in its infancy, applications for battolysers have received little study as yet. Jenkins et al [17] considered  
117 the lead-acid battolyser for the storage of excess energy from offshore windfarms; battolysers were  
118 shown to make better economic sense than electrolyzers, although there was not a clearcut superiority  
119 to batteries in economic terms. Similarly, Wagener [20] considered the nickel-iron battolyser in  
120 conjunction with offshore wind, finding that a battolyser CAPEX of < €250 / kW for the year 2050  
121 would make a battolyser system competitive with an electrolyser + flow battery system.


### 122 1.3 Contribution of this work

123 In this work, we assess a battolyser with hCooking as a possible route to cleaner cooking in SSA. The  
124 aim of the work is to ascertain whether the battolyser can compete economically with (a) charcoal  
125 (representing ‘business-as-usual’) and (b) eCooking. This will inform decision-making as to whether  
126 real-life pilots should be pursued for this application of the battolyser, and what improvements to the  
127 battolyser should be prioritised prior to such trials. The environmental benefits of cleaner cooking are  
128 also considered, represented by lifetime GHG emissions. By posing the system design as a multi-  
129 objective optimisation, we enable the play-off between emissions curtailment and cost to be understood,  
130 and can produce a spectrum of designs to achieve different levels of decarbonisation. This work  
131 contributes to an extremely small body of research on applications for the battolyser, and is likely the  
132 first study to consider an application other than storage of wind power. Likewise, it adds to a rather  
133 small body of research considering hCooking in microgrid contexts, and may be the first work to  
134 directly compare eCooking and hCooking.

## 135 2. Method

### 136 2.1 Overview

137  
138 In this work AnyLogic software [21] is used to simulate a microgrid with renewable energy generation,  
139 energy demands for both electrical power and for cooking, and energy storage in the form of either a  
140 battery or a battolyser with H<sub>2</sub> storage. Figure 2 shows the various components of the simulation model.  
141 OptQuest [22] global optimiser is then used to optimise the simulation parameters – i.e. the sizing of  
142 generation and energy storage. Optimisation objectives are the net present cost (NPC) of the microgrid,  
143 and its lifetime GHG emissions; thus, optimisation produces a Pareto frontier for the play-off between  
144 these objectives. Separate frontiers are produced for systems with eCooking + battery and hCooking +  
145 battolyser, enabling the comparison of these alternatives. Individual components of the model will now  
146 be presented in more detail.

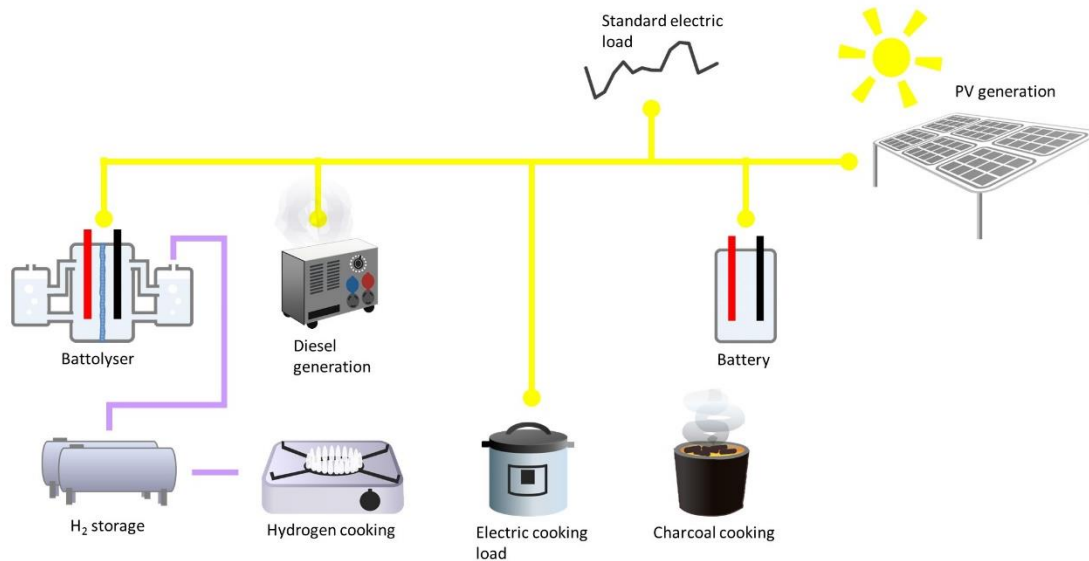

**Figure 2.** Components of the simulated microgrid with cooking load. N.B. not all components are present in every simulation run.

147

## 148 2.2 Characterisation of microgrid components

### 149 2.2.1 Cooking demands

150 The requirement for heat energy to cook a meal is dependent on the fuel used, as shown in Table 1. It  
 151 is assumed that the efficiency for hydrogen would be similar to that of LPG, where LPG stoves are  
 152 known to be around 4 times as efficient as charcoal stoves in energetic terms [2]. Cooking with  
 153 electricity is yet more efficient. Various electric cooking devices are available, of which the most  
 154 important are arguably hotplates and EPCs. Scott and Leach report that hotplates are around 5.5 times  
 155 more efficient than charcoal, and EPCs as much as 15 times as efficient [3]. A realistic scenario with  
 156 electric cooking uses a mixture of these devices. Here, numbers from Leach et al [2] are adopted, where  
 157 charcoal has around 13% the efficiency of electric cooking, and LPG / hydrogen 53%. Comparable  
 158 numbers may be found for instance in Martínez-Gómez et al [23] where LPG is shown to be 57% as  
 159 efficient as hotplates, and Sweeney et al [24] where gas burners are estimated to be 61% as efficient as  
 160 hotplates. Sensitivity analysis on the burner efficiency is included in Section 3.4.


**Table 1.** Demand for cooking energy by fuel, derived from Leach et al [2]. Scaled for 4.2 people per household. Hydrogen fuel is assumed to have the same efficiency as LPG.

Fuel	Cooking demand per house per day (kWh)	Equivalent mass (kg)	Relative efficiency
Charcoal	12.46	1.5 kg	0.13
Hydrogen	3.06	0.092 kg	0.53
Electricity	1.62	-	1.0

161

162 Note that the household daily demand for hydrogen would equate to 828g of water on the basis of  
 163 stoichiometry, or 197g per person per day, a requirement which is relatively small compared to the  
 164 requirements for drinking, cooking and washing. Regarding the timing of demand for cooking, a  
 165 demand profile for electric cooking from the Zambia Cooking Diaries [25] is adopted; this was modelled

166 using a combination of survey and meter data. The profile has been slightly smoothed and is shown in  
 167 Figure 3 with the solar irradiance profile for comparison. Note that the evening meal is prepared after  
 168 sundown, so solar energy cannot be used directly.

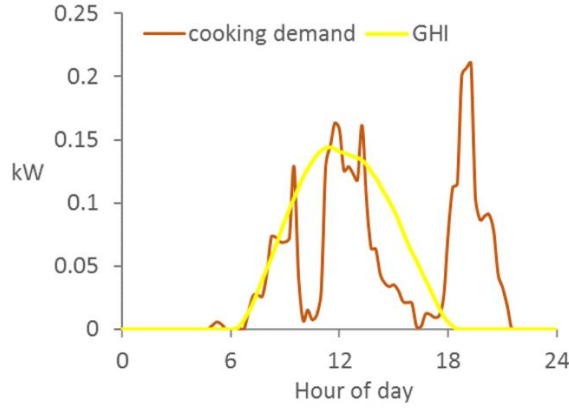

**Figure 3.** Daily cooking profile from the Zambia cooking diaries [25], with GHI for comparison. In this figure both profiles are normalised to a total of 1 kWh across the whole day.

169

### 170 2.2.2 PV

171 The PV model uses direct and diffuse irradiance components to calculate the total irradiance on a tilted  
 172 solar array, similar to [26]. Electrical conversion efficiency is assumed to be up to 15.4%, degrading  
 173 for module temperature above 25°C, with the temperature coefficient -0.35% / °C. Module temperature  
 174 is a function of incident radiation, air temperature and wind speed, as specified in the Sandia model  
 175 [27].

### 176 2.2.3 Battery / battolyser

177 The battery is described by energy capacity  $E_{batt}^{max}$  in kWh; power capacity  $P_{batt}^{max}$  in kW; round-trip  
 178 efficiency  $\eta_{batt}$ ; state-of-charge range; and parameters for cost and lifetime – see sections 2.5 and 2.6.  
 179 For simplicity, round-trip losses are assumed to be incurred during battery charging. The state-of-charge  
 180 range is assumed to be 50 – 100%, which is a common choice to improve cycle life [28], [29]. Power  
 181 capacity reflects the sizing of installed power electronics, and is also constrained in accordance with the  
 182 C-rate of the cells, assumed to be 0.5 [30]. Thus the operation of the battery is governed by equations  
 183 1-3:

$$\frac{d}{dt}E_{batt}(t) = \eta_{batt} \cdot P_{batt,ch} - P_{batt,dch} \quad (1)$$

$$0.5 \cdot E_{batt}^{max} \leq E_{batt}(t) \leq E_{batt}^{max} \quad (2)$$

$$P_{batt,ch}(t), P_{batt,dch}(t) \leq P_{batt}^{max} \quad (3)$$

184

185 The battolyser is modelled identically to the battery, but with the addition of electrolysis efficiency in  
 186 kWh / kg<sub>H2</sub> and electrolysis power capacity in kW. It is assumed that hydrogen production with the  
 187 battolyser commences only when it is fully charged as an electrical energy store, as in [17]. Battery and  
 188 battolyser are both assumed to be based on a lead-acid chemistry with electrical round trip efficiency  
 189 80%. Electrolysis efficiency is assumed to be 62%<sub>LHV</sub> (53.7 kWh/kg). Costs, degradation and embedded  
 190 emissions for the battery / battolyser are discussed in sections 2.5 and 2.6.

191 2.2.4 H<sub>2</sub> storage

192 The battolyser is assumed to operate at 20 bar pressure, and hydrogen is also stored at this same  
193 pressure. Accordingly, a compressor is not needed between the battolyser and the storage. Storage is  
194 described by the capacity  $M_{H_2}$ , in kg<sub>H<sub>2</sub></sub>, as well as the cost and emissions factors given in Section 2.5.  
195 20 bar pressure corresponds to a storage density of ca. 1.69 kg / m<sup>3</sup>, or 56 kWh<sub>LHV</sub> / m<sup>3</sup>.

196 2.2.5 Diesel generation

197 Diesel generation is characterised by capacity  $P_{diesel}$  (kW) and efficiency (kWh / litre).


198

199 2.3 Dispatch of microgrid

200 Dispatch of the simulated microgrid is by a greedy algorithm, which is triggered when any of the  
201 following events occur:

- 202 • The battolyser / battery becomes fully charged or fully discharged
- 203 • The H<sub>2</sub> storage becomes full / empty
- 204 • The required power for cooking changes (30 minutely)
- 205 • The required standard electric load changes (15 minutely)
- 206 • The PV generation output changes (5 minutely)

207 The greedy algorithm for dispatch of electrical devices is shown in Figure 4. Consumption of hydrogen  
208 from the storage is omitted from the flowchart: if hydrogen is available, it is used to fulfil the cooking  
209 demand; otherwise charcoal is used.

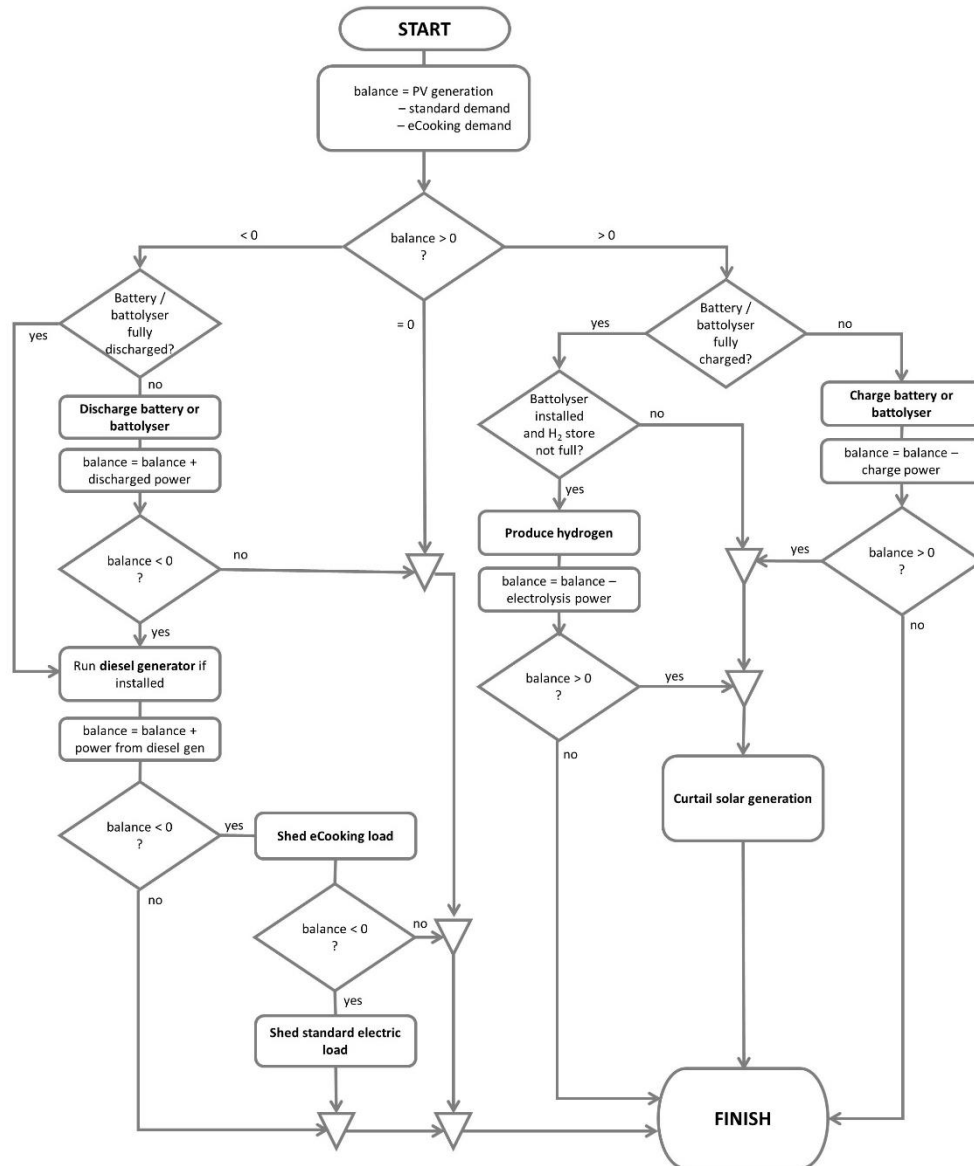

**Figure 4.** Greedy algorithm for dispatch of the microgrid's electrical devices.

210

211 Since the control algorithm is simple and fast to execute, the simulation run-time is kept short enough  
212 for use with an optimiser to be practical.

213 Load shedding by substituting electric or hydrogen cooking with charcoal might not be practical to  
214 implement in reality; nonetheless, this aspect ensures that the lack of sufficient clean energy at a  
215 particular time is captured by the model and penalised. It is assumed here that production of hydrogen  
216 does not commence until the battolyser is fully charged, as in [17].

## 217 2.4 Optimisation variables, constraints and requirements

218 Optimisation employs the OptQuest [22] global optimiser, with each iteration being the simulation of  
219 the microgrid for one year. The following subsections detail the variables, constraints and objectives  
220 used.



221 2.4.1 Variables

222 The multi-objective optimisation involves five binary variables and seven continuous-valued variables,  
 223 as shown in Table 2. Upper bounds for continuous variables were chosen on the basis of preliminary  
 224 results, to ensure the search-space is kept small whilst still containing the global optimum.

**Table 2.** Decision variables for the optimisation.

Symbol	Description	Unit	Type	Domain
$b_{btl}$	installation of battolyser	-	binary	{0,1}
$b_{batt}$	installation of battery	-	binary	{0,1}
$b_{diesel}$	installation of diesel generator	-	binary	{0,1}
$b_{elec}$	electric cooking	-	binary	{0,1}
$b_{H2}$	hydrogen cooking	-	binary	{0,1}
$E_{btl}^{max}$	Energy capacity of battolyser	kWh	continuous	[0, 500]
$P_{btl}^{max}$	Power capacity of battolyser	kW	continuous	[0, 250]
$E_{batt}^{max}$	Energy capacity of battery	kWh	continuous	[0, 500]
$P_{batt}^{max}$	Power capacity of battery	kW	continuous	[0, 250]
$P_{PV}$	PV capacity installed	kW	continuous	[0, 250]
$P_{diesel}$	Diesel generation capacity installed	kW	continuous	[0, 100]
$M_{H2}$	Hydrogen storage installed	kg	continuous	[0, 1600]

225

226 2.4.2 Constraints

227 It is assumed that either battery or battolyser is installed, but not both. This is controlled by binary  
 228 variables  $b_{btl}$  and  $b_{batt}$ , as given in equations 4 - 8:

$$b_{btl} + b_{batt} \leq 1 \quad (4)$$

$$E_{btl}^{max} \leq 1000 \cdot b_{btl} \quad (5)$$

$$P_{btl}^{max} \leq 1000 \cdot b_{btl} \quad (6)$$

$$E_{batt}^{max} \leq 1000 \cdot b_{batt} \quad (7)$$

$$P_{batt}^{max} \leq 1000 \cdot b_{batt} \quad (8)$$

229

230 The choice between eCooking and hCooking is described by Equation 9:

$$b_{elec} + b_{H2} \leq 1 \quad (9)$$

231

232 hCooking can only be used if the battolyser is installed:

$$b_{H2} - b_{btl} \leq 0 \quad (10)$$

233

234 eCooking is not used if the battolyser is installed (see Section 4 regarding the relaxation of this  
 235 constraint):

$$b_{elec} + b_{btl} \leq 1 \quad (11)$$

236

237 C-rates for the battery / battolyser:

$$P_{btl}^{max} \leq 0.5 \cdot E_{btl}^{max} \quad (12)$$

$$P_{batt}^{max} \leq 0.5 \cdot E_{batt}^{max} \quad (13)$$

238

239 H<sub>2</sub> storage is installed only if the battolyser is installed:

$$M_{H2} \leq 1000 \cdot b_{btl} \quad (14)$$

240

241 Diesel power rating is constrained by diesel installation variable:

$$P_{diesel} \leq 1000 \cdot b_{diesel} \quad (15)$$

242

### 243 2.4.3 Objectives

244 The objectives of the multi-objective optimisation are the lifetime GHG emissions and the net present  
 245 cost (NPC). Lifetime GHG emissions  $GHG_{lifetime}$  are the sum of the original embodied emissions  
 246  $GHG_{emb}$ , and the annual emissions from fuel combustion  $GHG_n^{fc}$  and further embodied emissions from  
 247 equipment replacement  $GHG_n^{rep}$ :

$$GHG_{lifetime} = GHG_{emb} + \sum_{n=1}^{20} (GHG_n^{fc} + GHG_n^{rep}) \quad (16)$$

248

249 NPC is given by Equation 17. It consists of capital costs  $C_{CAPEX}$ , as well as annual costs for each year  
 250  $n$  of operation:  $C_n^{OPEX}$  for equipment OPEX;  $C_n^{fuel}$  representing fuel costs;  $C_n^{rep}$  for costs of equipment  
 251 replacement; and  $C_n^{pen}$  representing the penalty for any loss-of-load (see below).

252

$$NPC = C_{CAPEX} + \sum_{n=1}^{20} \frac{(C_n^{OPEX} + C_n^{fuel} + C_n^{rep} + C_n^{pen})}{(1+i)^n} \quad (17)$$

253

254 where 20 is the assumed lifetime of the project in years, and  $i$  is the discount rate, assumed as 12%. An  
 255 inflation rate of 2% is also applied to costs. A penalty of \$1 / kWh is applied for any loss of electrical  
 256 load; this value is considered appropriate being roughly double the marginal cost of running diesel  
 257 generation, and also an order of magnitude greater than typical electricity prices in Zambia [31]; loss of  
 258 electrical load for South Africa has been valued at ca. \$0.66/kWh for 2018-19 [32]. Loss of load is also  
 259 required to be below 0.1% of annual electricity demand [33]. Besides NPC, annualised cost will also  
 260 be discussed, and this represents the uniform annual cash flow that would result in the same overall  
 261 NPC.

262

263 2.5 Cost assumptions

264 2.5.1 CAPEX

265 Total CAPEX  $C_{CAPEX}$  is calculated from unit costs for the various components of the microgrid, given  
 266 in Table 3. The unit costs for the battolyser have been calculated as part of the LoCEL-H2 project [34];  
 267 the details will be published in due course. ‘Low’ and ‘high’ values are relevant to the sensitivity  
 268 analysis in Section 3.4.

**Table 3.** CAPEX values

Component	Unit	Cost (USD)	Source
PV	kW	<b>Baseline:</b> 1870 <b>Low:</b> 1000	[35][36]
Wind turbine	kW	2000	[36][37]
Lead-acid battery - energy component	kWh	274	[28]
Lead-acid battery - power component	kW	195	[28]
Lead-acid battolyser - energy component	kWh	<b>Baseline:</b> 357 <b>Low:</b> 238	-
Lead-acid battolyser - power component	kW	120	-
Hydrogen storage	kWh	<b>Baseline:</b> 20 <b>Low:</b> 10 <b>High:</b> 50	[10]–[12]
Diesel generator	kW	500	[38]
Diesel tank	-	500	[34]
Hydrogen stove	-	50	[13], [39]
Pressure cooker	-	40	[39]
Hotplate	-	24	[40]
Ceramic charcoal stove	-	4	[39]

269

270 2.5.2 OPEX

271 OPEX is calculated for five microgrid components, as specified in Table 4.

**Table 4.** OPEX assumptions.

Component	Annual OPEX	Source
PV	\$13 / kW	[41]
Wind turbine	\$50 / kW	[36]
Lead-acid battery / battolyser	\$10 / kW	[17]
Hydrogen storage	1% of CAPEX	[42]
Diesel generator	2% of CAPEX	[36]

272

273

274 2.5.3 Equipment replacement

275 Equipment replacement is considered for PV, battolyser / battery, diesel tank and diesel generation.  
 276 Wind generation is also considered as a supplementary option. Replacement of components entails  
 277 additional costs and also additional GHG emissions. Relevant equipment lifetimes are given in Table  
 278 5. It is assumed as a baseline that the battolyser would be capable of 20000 hours of electrolysis, this  
 279 being towards the low end of the lifetimes achievable by existing electrolyser technology [43].

**Table 5.** Equipment replacement assumptions

Component	Lifetime	Symbol	Source
Lead-acid battery / battolyser - energy component cycle life	<b>Baseline:</b> 1000 cycles <b>Low:</b> 500 cycles <b>High:</b> 3000 cycles	$L_{btl,cycle}$	[44]
Lead-acid battery / battolyser - energy component calendar life	12 years	$L_{btl,cal}$	[28]
Lead-acid battolyser - energy component electrolysis life	<b>Baseline:</b> 20000 hours <b>High:</b> 50000 hours	$L_{btl,elec}$	-
Lead-acid battery / battolyser - power component	15 years	-	[45] [38]
Diesel generator	15000 hours	-	[38]
Diesel tank	20 years	-	-
PV	25 years	-	[38], [45]
Wind turbine	25 years	-	[36]

280

281 The battolyser is assumed to be degraded by both cycling as an electrical energy store, and by operation  
 282 as an electrolyser, with both these modes combining to give total annual degradation. Additionally,  
 283 lifetime does not exceed the assumed calendar life. The lifetime in years before replacement is necessary  
 284 is thus given by Equation 18:

$$lifetime (years) = \min \left( L_{btl,cal}, \left( \frac{annual\ cycles}{L_{btl,cycle}} + \frac{annual\ hours\ electrolysis}{L_{btl,elec}} \right)^{-1} \right) \quad (18)$$

285

286 The power component of the battolyser cost is separate, and is assumed to be replaced once in the  
 287 lifetime of the system. System lifetime is conservatively taken as 20 years [46], [47].

288

289 2.6 GHG emissions

290 Embodied emissions are considered for the battery / battolyser, the PV generation and the diesel  
 291 generation. Embodied emissions are incurred again if equipment is replaced during the project lifetime.  
 292 For simplicity, the emissions associated with battery / battolyser are assumed to be incurred wholly by  
 293 the energy component. Due to lack of data, embodied emissions for the battolyser are assumed to be  
 294 similar to those of the lead-acid battery; whilst the battolyser includes unique components not found in  
 295 the lead-acid battery (such as electrolyte tanks and circulation pumps) there is some indication in the

296 literature that the contribution of these components may be small [48], [49]. Operational emissions are  
297 due to the consumption of diesel or charcoal. Assumptions on emissions are found in Table 6.  
298

**Table 6.** GHG emissions

Component	Embodied emissions	Source
PV system	<b>Baseline:</b> 1500 kgCO <sub>2</sub> /kW	[50]
	<b>Low:</b> 615 kgCO <sub>2</sub> e/kW	[51]
	<b>High:</b> 2700 kgCO <sub>2</sub> e/kW	[52]
Lead-acid battery / battolyser	150 kgCO <sub>2</sub> e/kWh	[52]
Diesel generator	500 kgCO <sub>2</sub> e/kW	[52]
Wind turbine	900 kgCO <sub>2</sub> e/kW	[52]
Fuel	Emissions	Source
Charcoal	6.65 kgCO <sub>2</sub> e/kg*	[53]
Diesel	2.7 kgCO <sub>2</sub> e/l*	[54]

\*Including production and combustion

299

### 300 3. Results

#### 301 3.1 Case study

302 For the purposes of the solar model, the chosen location is 13.646°S 27.616°E which is Machiya, ca.  
303 90 miles NW of Kabwe, Zambia. Climate data for this location was procured from Solcast [55]. The  
304 solar resource for this location is approximately 2000 kWh / m<sup>2</sup> / a, enabling a PV capacity factor  
305 approaching 25%. The PV system is almost horizontal, with tilt to the North of just 10°; this orientation  
306 was established by including PV azimuth and tilt as variables in early optimisation runs.

307 Half-hour resolution data for standard electrical load has been obtained from a microgrid project in  
308 Tanzania [56]. This project had 47 customers in 2018, rising to 239 by 2021. Here the demand has been  
309 rescaled to represent 100 customers. Standard electricity consumption averages only 270 Wh per  
310 household per day, and consists mainly of phone chargers and lighting, with some TVs, radios and  
311 fridges. If eCooking is added (at 1.62 kWh / household / day) it thus becomes almost 86% of total  
312 demand.

313 For the 100 customers, one day of eCooking demand is 162 kWh; 189 kWh including the standard load.  
314 One day of hCooking demand is 306 kWh or 9.2 kg. References to storage durations in terms of days  
315 are made with respect to these values.

316 Charcoal is assumed to cost \$0.294 / kg [3], [7], with the energy density being 29.9 MJ / kg. Diesel is  
317 assumed to cost \$1.18 per litre, with the generator efficiency being 20%, equivalently 2.54 kWh<sub>e</sub> per  
318 litre.

319 The results below are worth considering in context of the average income in Zambia, which is in the  
320 region \$200 - \$400 per month [57].

#### 321 3.2 Overview of results


322

323 Figure 5 shows the Pareto frontier for NPC against lifetime emissions, with the breakdown shown for  
324 components of NPC. Figure 5 (a) shows systems using hCooking and/or charcoal; Figure 5 (b) shows  
325 systems using eCooking and/or charcoal. The Pareto frontiers without breakdown can be seen in Figure  
326 8 (a). The system designs from the extremities of the frontiers, numbered 1 – 4, are of interest for further  
327 consideration:

- 328 1. The **most carbon intensive** system is found at the right-hand extremity of Figure 5(a). It is the  
 329 cheapest solution when eCooking is excluded. It uses exclusively charcoal for cooking, with a  
 330 small PV + diesel + battery system to supply electricity demand. This system has lifetime  
 331 emissions of 7480 tCO<sub>2</sub>e (97.6% from charcoal), and is regarded as the baseline for carbon  
 332 reduction. This system has NPC \$200k and annualised cost \$213 / household.  
 333
- 334 2. The **cheapest eCooking** system is found at the right-hand extremity of Figure 5(b). This system  
 335 uses eCooking, but only for the first two meals of the day. No battery storage is installed, so  
 336 the evening meal is still cooked on charcoal. The system has lifetime emissions 3019 tCO<sub>2</sub>e,  
 337 NPC \$186k and annualised cost \$205 per household.  
 338
- 339 3. The **lowest carbon battolyser** system is the hCook system found at the left-hand extremity of  
 340 Figure 5(a). Here, focus is placed on the system achieving ca. 99.5% of the maximum emissions  
 341 curtailment, since achieving the final 0.5% of curtailment adds 7% to NPC. This system has  
 342 lifetime emissions 327 tCO<sub>2</sub>e, NPC \$427k and annualised cost \$507 per household.  
 343
- 344 4. The **lowest carbon battery** system is the eCook system found at the left-hand extremity of  
 345 Figure 5(b). Again, focus is placed on the system achieving 99.5% of the maximum emissions  
 346 curtailment: the final 0.5% of curtailment adds 23% to NPC. This system has lifetime emissions  
 347 317 tCO<sub>2</sub>e, NPC \$355k, and annualised cost \$422 per household. This system uses exclusively  
 348 eCooking with no charcoal.  
 349

350 It should be noted that complete curtailment of lifetime emissions is impossible owing to embodied  
 351 emissions. More details of systems 1 to 4, including the sizing of components, are given in Table 7.

352

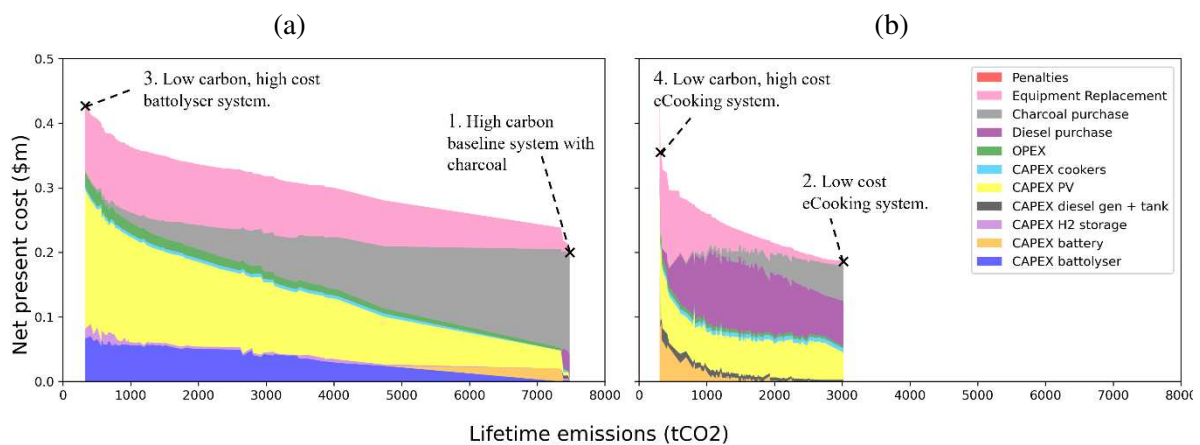

**Figure 5.** NPC, with breakdown, versus lifetime emissions. (a) Systems with hCooking. (b) Systems with eCooking. The upper edge of each plot gives the Pareto frontier for emissions versus NPC.

353

354 Overall, it is clear that the hCook systems in Figure 5(a) are Pareto dominated by the eCook systems in  
 355 Figure 5(b); in other words, for any desired level of emissions curtailment, eCooking, possibly with a  
 356 battery, is the cheaper approach. This may be clearer in Figure 8 (a) where the two Pareto frontiers are  
 357 superimposed. The battolyser systems are closer to being competitive at the more fully decarbonised  
 358 end of the scale, but are nonetheless still dominated by eCook systems. It is worth noting that a low-  
 359 carbon hCooking + battolyser system requires around double the amount of PV as for eCooking +  
 360 battery (see Table 7); this is a result of the inherently higher energy requirement for cooking on a flame.

361 Consequently, PV CAPEX contributes over 50% of NPC for the low-carbon battolyser system, and  
 362 only 32% for the battery. The implication is that battolyser + hCook may not be a good technology  
 363 choice for the application considered here.

364 It is interesting to note that these results suggest eCooking as financially advantageous as well as  
 365 environmentally beneficial. Specifically, System 2 cuts three-fifths of emissions compared to System  
 366 1, but is also cheaper (see Table 7). This is achieved by only decarbonising the meals during daytime,  
 367 and continuing to use charcoal for the evening meal, as shown by the average energy profile in Figure  
 368 6 (a). Decarbonising the evening meal can be done most cheaply by running eCookers on diesel  
 369 generation; this can cut around half the remaining emissions. Fuller decarbonisation requires substantial  
 370 battery storage as in System 4, and is no longer cost-competitive with charcoal.

371


**Table 7.** Details of systems 1 – 4.

	(1) Most carbon-intensive system	(2) Cheapest system	(3) Cleanest battolyser system	(4) Cleanest battery system
Cooking	charcoal	eCook + charcoal	hCook + charcoal	eCook
Proportion of cooking on charcoal	100%	36%	0.4%	0%
Battery kW	0.044	-	-	46.3
Battery kWh	0.087	-	-	273.1
Battolyser kW	-	-	80.2	-
Battolyser kWh	-	-	160.4	-
H <sub>2</sub> storage kg	-	-	19.9	-
PV kW	0.80	22.6	117.0	59.9
Curtailed PV	2.65%	9.22%	6.60%	10.7%
Diesel kW	3.36	4.18	-	20.0
Diesel capacity factor	28.4%	43.6%	-	0.25%
NPC \$k	200	186	427	355
Lifetime emissions tCO <sub>2</sub> e	7480	3019 (-59.6%)	327 (-95.6%)	317 (-95.8%)
Annualised cost \$ per household	213	205	507	422


372

373



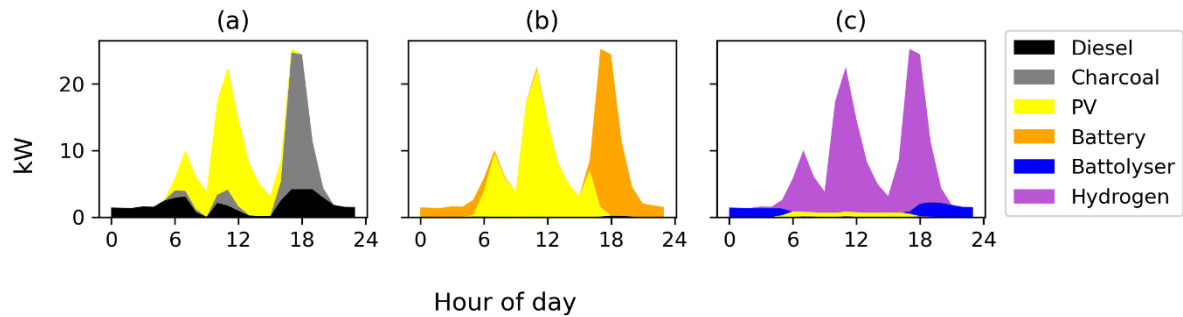

**Figure 6.** Energy sources providing cooking and standard load, as an average daily profile. (a) cheapest eCooking system (System 2); (b) least carbon intensive eCooking system (System 4); (c) System 3 - least carbon-intensive hCooking system (System 3). Cooking supplied by charcoal or hydrogen is plotted according to the equivalent electrical demand, resulting in an identical aggregate profile across (a) (b) and (c). Energy for battery charging is not shown, and nor is curtailed generation. Note that in (c), direct use of solar power for cooking is impossible; all PV energy must be converted to hydrogen prior to use for cooking.

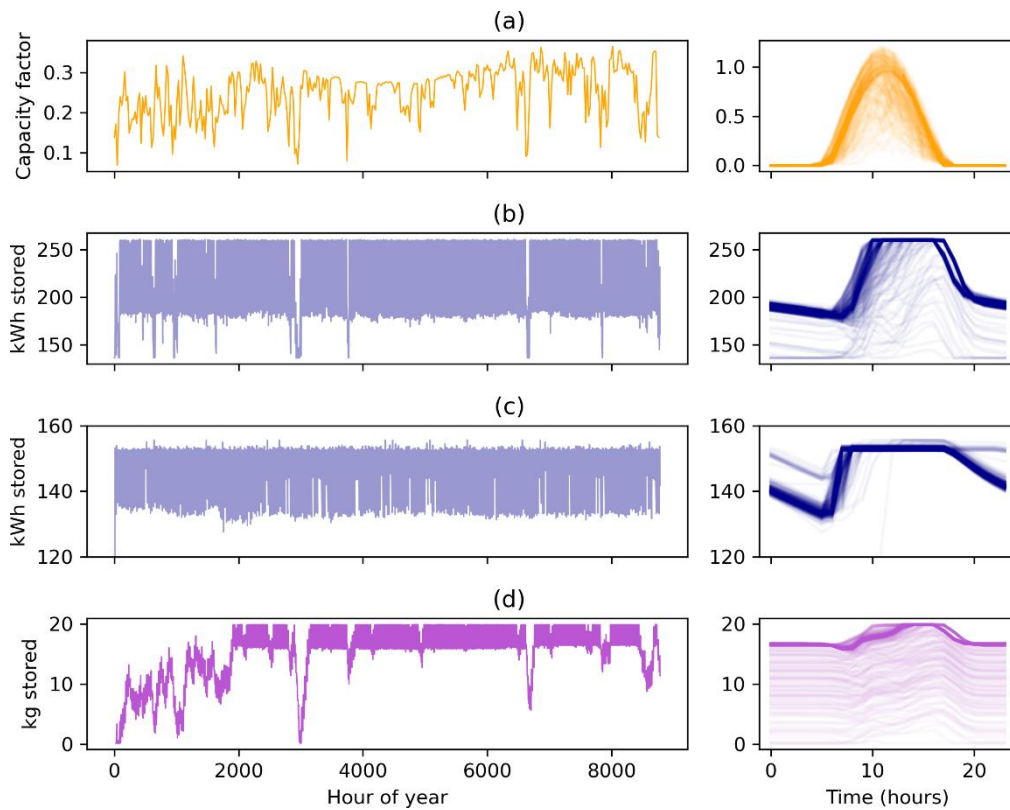

**Figure 7.** Cycling of energy storages, with solar resource for comparison. Columns 1 and 2 respectively show the annual and the diurnal profiles. (a) Solar capacity factor (daily average in column 1). (b): Battery state-of-charge for System 4 (low carbon battery system). (c) and (d): Respectively, battolyser and H<sub>2</sub> tank state-of-charge for System 3 (low carbon battolyser system).

374

### 375 3.3 Storage size and cycling

376 Figure 7 shows the cycling of energy storage for the highly decarbonised systems, with the solar  
 377 resource for context. 7 (b) shows the cycling of the battery in System 4; 7 (c) and (d) show the cycling

378 of respectively the battolyser and the hydrogen store in System 3. The solar resource is relatively  
379 reliable; it is most intermittent in the rainy season (approximately November to April) which is reflected  
380 in the increased cycling of storage in this part of the year. The most pronounced discharge of storage  
381 occurs on 4<sup>th</sup> May, after three consecutive days of low irradiance, unusual in Zambia. The high  
382 reliability of the solar resource is reflected in the designed storage durations: System 4 has battery  
383 storage of only 0.84 days, while System 3 has H<sub>2</sub> storage for 2.2 days of cooking demand. As an  
384 electrical energy store, the battolyser undergoes rather shallow cycles after its initial charge, remaining  
385 in the state-of-charge range 80 – 100%. This reflects the low demand for electricity when excluding  
386 eCooking; the shallow cycling should be beneficial for minimising degradation. Total CAPEX on  
387 energy storage is similar in each case: \$80.1k (27%) for the battolyser and H<sub>2</sub> storage in System 3;  
388 \$83.9k (40.4%) for battery storage in System 4. Whilst the total energy storage CAPEX is less per kWh  
389 for the hydrogen system, the inherent inefficiencies in the hydrogen system tend to cancel out this  
390 advantage. The eCook system also has an advantage in that only part of the day's demand need be stored  
391 (the part not coincident with the solar resource). Given the relatively short storage durations, it is  
392 possible that a more intermittent energy source would provide better justification for the hCooking  
393 system.

### 394 3.4 Sensitivity analysis


395 As above, hCook systems with the battolyser are generally Pareto dominated by eCook systems, with  
396 respect to the optimisation objectives of cost and lifetime emissions; this can be seen in Figure 8 (a).  
397 This conclusion was subjected to sensitivity analysis on battolyser and battery lifetime; battolyser, H<sub>2</sub>  
398 store and PV costs; and hob efficiency. The specific values used are given as **low** or **high** limits in  
399 Section 2.5. Additionally, results were repeated with the use of diesel disallowed; note that all Pareto  
400 optimal solutions with eCook made some use of diesel in the original results. The Pareto frontiers under  
401 sensitivity analysis are presented in Figure 8 (b) – (g).

- 402 • A battolyser with significant improvements to lifetime (e.g. 3000 cycles or 50000 hours of  
403 electrolysis) could be competitive with the eCook system – see Figure 8 (b). However, this is  
404 only true for systems with the very highest level of decarbonisation. Four replacements of the  
405 battolyser energy components would be required for System 3 under baseline assumptions;  
406 increased cycle life would decrease this to three; increased electrolysis life would decrease it to  
407 two.
- 408 • Figure 8 (c) shows the results of varying battery lifetime for the eCook systems. The impact is  
409 greater than for the battolyser, and a cycle life of 3000 could bring the annualised cost of System  
410 4 down to \$269 per household, which could be an acceptable cost when compared with the cost  
411 of charcoal. Cycle life of 3000 would enable only one battery replacement during the project  
412 lifetime.
- 413 • Variation in the cost of H<sub>2</sub> storage has virtually no impact on the Pareto frontier, which is  
414 unsurprising given the negligible contribution of H<sub>2</sub> storage to NPC (see Figure 5(a)). Longer  
415 storage durations would be needed for this to be an important factor. A reduction by one third  
416 in the cost per kWh of the battolyser, which is considered realistic for the future, would have  
417 more impact, but the battolyser systems continue to be dominated by the eCook systems in this  
418 case.
- 419 • Battolyser systems require a large capacity of PV, as already stated. System NPC is very  
420 sensitive to PV cost and a reduction would close the gap with eCooking, although eCooking  
421 would remain optimal. See Figure 8 (e).

422 • Removing the option to use diesel as backup significantly increases the cost of eCook systems  
 423 at moderate levels of decarbonisation, as shown in Figure 8 (f). However, the eCook systems  
 424 largely remain preferable to the hCook systems.

425 Figure 8 (g) shows the potential impact of varying hydrogen burner efficiency (see also Section 2.2.1).  
 426 It is clear that the inferior efficiency for hCook in the base case is a main driving factor behind the  
 427 dominance of the eCook systems. If the hydrogen hob could match the efficiency of eCooking devices,  
 428 or even achieve 75% of the efficiency, hCooking with the battolyser would be the cheaper way to  
 429 achieve deep cuts to lifetime emissions. It is plausible that progress could be made towards closing the  
 430 efficiency gap, as described for instance in Zhang et al [58].

431

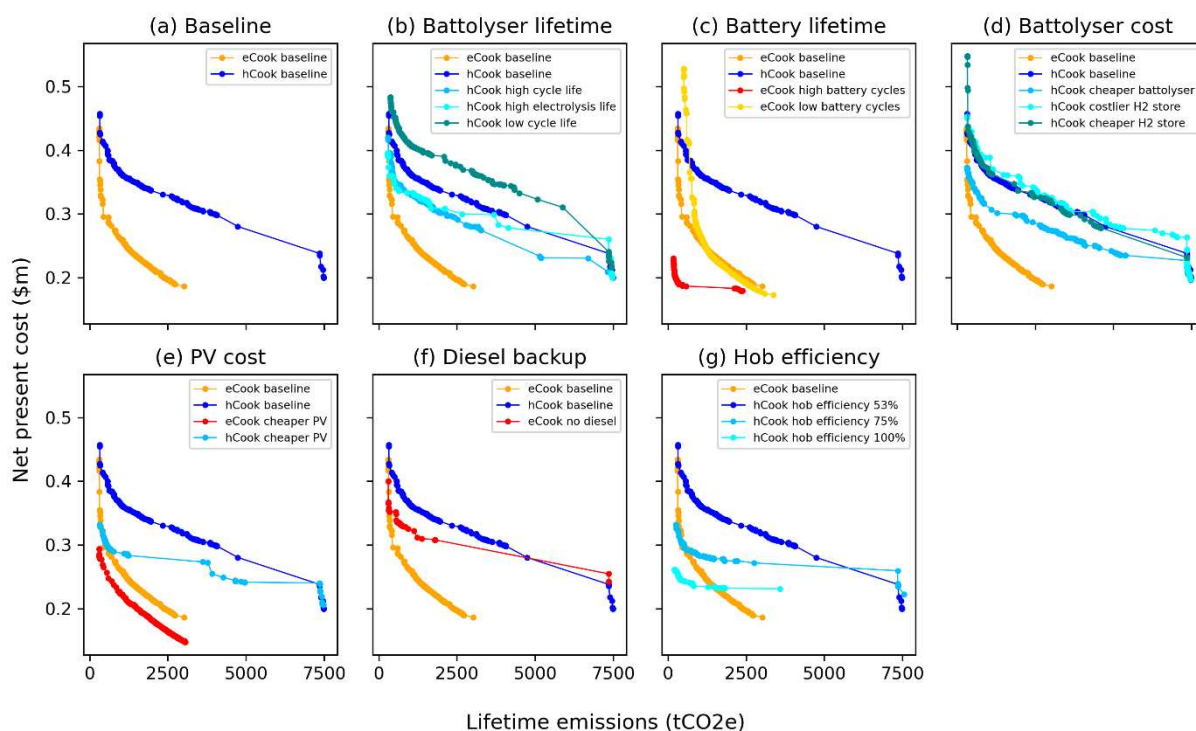

**Figure 8** Pareto frontiers under sensitivity analysis. Generally, the eCooking systems continue to dominate the hCooking systems, with rare exceptions. Regarding (g), recall that ‘efficiency’ is relative to the eCooking consumption.

432

### 433 3.5 Alternative scenarios


434

435 Results have demonstrated that under most scenarios, the battolyser + hCook system does not compete  
 436 with battery + eCook. This is ascribed mainly to the inherently higher efficiency of eCooking, which  
 437 importantly allows for much less PV generation to be installed.


438 The main advantage of hydrogen for energy storage is the low per kWh cost, which allows for bulk,  
 439 long duration storage. The reliable nature of the solar resource in the case study (the longest dip in  
 440 generation was only three days) means that long duration storage isn’t required. Accordingly, two  
 441 additional experiments were conducted: (1) swapping the PV generation for wind power, which might  
 442 be expected to exhibit longer term variations, and (2) moving the PV case study location to Rwanda,

443 which experiences a much less reliable solar resource. Wind speed data for the Zambia case study was  
 444 rescaled to enforce an annual wind capacity factor of 25%, using the power curve for a 150 kW turbine  
 445 [59]; this capacity factor is known to be achievable in some regions of SSA [60]. Irradiance data for  
 446 Rwanda was obtained from Solcast as before, with the total GHI being 1647 kWh/m<sup>2</sup>/a.

447 The additional results are shown in Figure 9 (wind power, Zambia) and Figure 10 (PV power, Rwanda).  
 448 Battolyser + hCook systems are Pareto-dominated by battery + eCook systems as before. Powering the  
 449 microgrid with wind is significantly more expensive overall, which is likely because the solar resource  
 450 actually synchronises better with the cooking demand than wind (cosine similarity 0.50 for wind, 0.62  
 451 for PV). Similarly, moving the case study to Rwanda increases overall cost, owing to the inferior solar  
 452 resource, but battery + eCook remains preferable to battolyser + hCook.

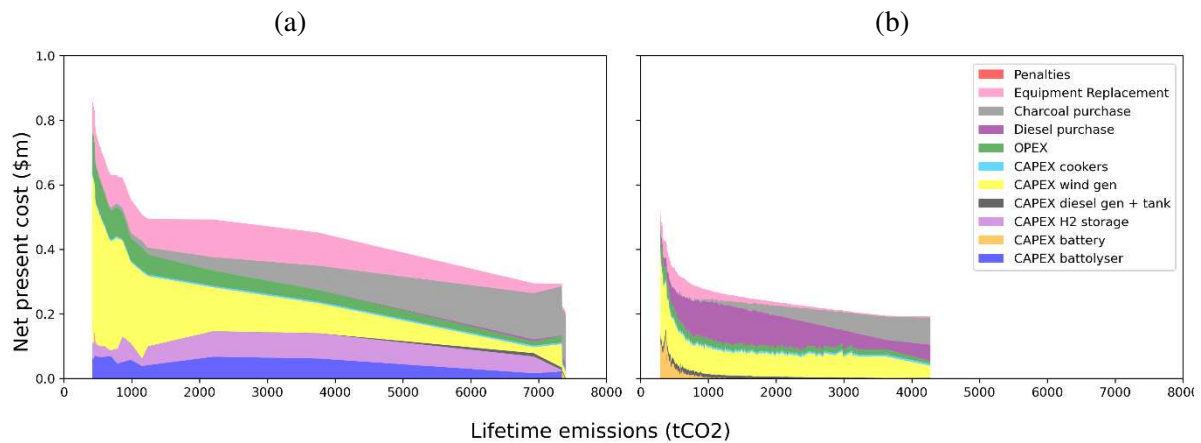

**Figure 9.** NPC, with breakdown, versus lifetime emissions, with **wind generation replacing PV**. (a) Systems with hCooking. (b) Systems with eCooking. The upper edge of each plot gives the Pareto frontier for emissions versus NPC. Cost and emissions metrics for wind are given in Section 2.

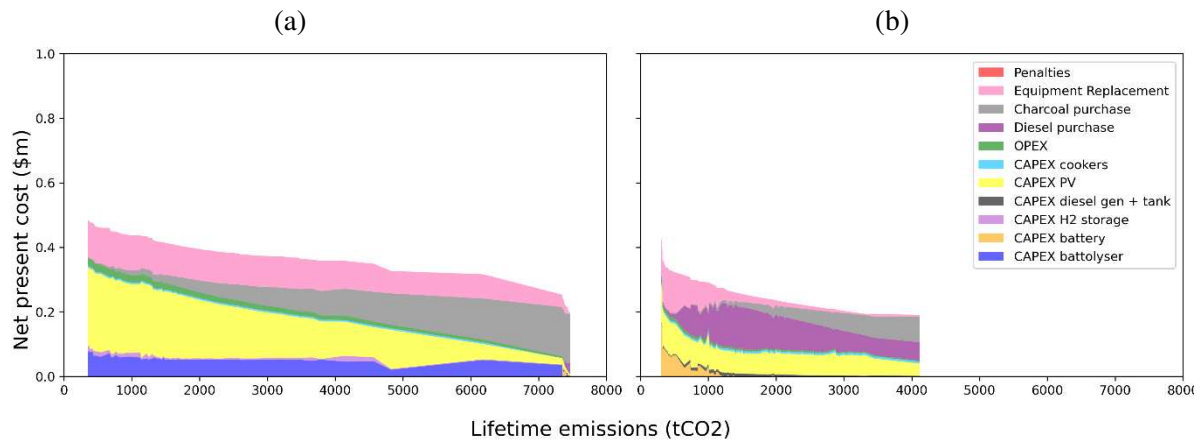

**Figure 10.** NPC, with breakdown, versus lifetime emissions, for Rwanda, which has a more variable solar resource. (a) Systems with hCooking. (b) Systems with eCooking. The upper edge of each plot gives the Pareto frontier for emissions versus NPC.

453

454

## 455 4. Discussion

456

457 With results showing the hCooking + battolyser system to be Pareto dominated by eCooking systems  
458 in most scenarios, it is of interest to explore where any potential of the battolyser has not been fully  
459 realised. For instance, Figure 7 (c) shows that the potential of the battolyser as an electrical energy store  
460 as well as an electrolyser is not necessarily well used; cycling of the battolyser was only in the range  
461 80 – 100%. With the aggregate electricity demand of 100 households being only 27 kWh / day, the  
462 electrical storage has limited value if eCooking is not used. Higher electrical demand could perhaps  
463 improve the case for the battolyser. One possible approach would be to use a mix of eCook and hCook,  
464 so that electrical discharge of the battolyser can supply some eCook demand. Original results did not  
465 allow this, imposing a binary choice between hCook and eCook, and enforcing the use of hCook with  
466 the battolyser. Accordingly, the constraint from Equation 11 was relaxed, and a proportional split  
467 between hCook and eCook was permitted. The somewhat unexpected result was that the optimiser  
468 assigned 100% of cooking to eCooking, and the battolyser was used purely as an electrical energy store,  
469 with no use for any hydrogen produced. The Pareto frontier was similar to the baseline curve for eCook,  
470 although slightly less favourable owing to the unnecessary additional cost of battolyser versus battery.  
471 This rather emphasises the difficulty in finding a good case for hCooking.

472 It is interesting to consider a different possible approach, where stored hydrogen is used in a fuel cell  
473 to generate power for eCooking. In fact this comparison was made by Schöne et al [13]. Such an  
474 approach avoids the efficiency penalty of hCook versus eCook (estimated at 53% in this work).  
475 However, a similar inefficiency would instead be introduced by the fuel cell, which would likely offer  
476 efficiency of roughly 60%<sub>LHV</sub>. With the capital costs associated with the fuel cell, it is unsurprising that  
477 Schöne et al found direct combustion of the hydrogen to be preferable.

478 Network cost (for either electricity or hydrogen) has not been considered here. This is partly justified  
479 by the long life of this infrastructure relative to the energy components, probably at least 40 years [45].  
480 Further, the cost of installing a hydrogen network in this type of context is rather uncertain. It is likely  
481 that consideration of networks would only emphasize the superiority of the eCooking option –  
482 especially as a high capacity electrical network could enable many new appliances to be introduced, not  
483 only eCookers; a hydrogen network, by contrast, would be single purpose. It is possible that hydrogen  
484 dispensing to households could be achieved without a pipe network; for instance [14] envisages  
485 hydrogen delivered in metal hydride storage. Safety, and also the perception of safety, will be a key  
486 concern for any hydrogen project, given that even EPCs and LPG have caused concern for users in this  
487 respect [15].

488 There is a possibility that a battolyser with very good durability (e.g. 50000 hours of electrolysis or  
489 3000 cycles) could be close to competitive with an eCooking system. However, even if this durability  
490 could be achieved, there are more factors to consider. Firstly, as mentioned, costs of dispensing the  
491 hydrogen to users have not been considered in this introductory study. Secondly, hydrogen is highly  
492 volatile and difficult to handle safely. Thirdly, the battery system is likely more versatile as it will enable  
493 adoption of other appliances, not limited to cooking.

494 Although this study's results suggest that it is challenging to find an application for the battolyser in  
495 decarbonisation of cooking, from a wider perspective the results are encouraging. In the case study,  
496 60% of lifetime GHG emissions could be eliminated by a switch to eCooking, whilst actually saving  
497 money relative to the base case with charcoal. This backs up previous results in the literature, such as  
498 Antonanzas-Torres et al [4] and Lombardi et al [5] which suggested that eCook cost-competitiveness was  
499 a possibility. Here, results show that 69% emissions curtailment could be achieved before the base case

500 cost is exceeded. The difficulty is in decarbonising the evening meal; significant use of battery storage  
501 does lead to a higher cost than the base case. The annualised cost of a highly decarbonised system is  
502 \$422 per household, against \$213 for continuing charcoal use; recall that the average income in Zambia  
503 is in the region \$200 - \$400 per month [57].

504

#### 505 4.1 Limitations and future work

506

507 In this work, attempt has not been made to quantify benefits of a switch away from charcoal, beyond  
508 the GHG abatement and possible financial savings. A future study could broaden the analysis to  
509 encompass other important factors, which might include the health benefits of cleaner cooking that arise  
510 from reduced air pollution, and the knock-on economic benefits of this; as well as the creation of jobs  
511 in the renewable energy sector. Additional economic benefits might result from eCooking in particular,  
512 since a microgrid able to support it should also be able to support the adoption of other appliances.

513 The three cooking fuels considered in this work were charcoal, hydrogen and electricity. Leach et al [2]  
514 demonstrated the value of stacking LPG with alternative fuels, and perhaps battolyser with LPG backup  
515 could be considered in the future.

516 Lead-acid chemistry was assumed for the conventional battery in this work. Whilst lead-acid batteries  
517 are common for microgrids in the region, consideration of Li-ion chemistry might be worthwhile for  
518 future studies.

519 The degradation of the battolyser has not been modelled in detail in this work. The very shallow cycling  
520 in this study could be beneficial to cycle life, and this could be modelled more explicitly in future  
521 analyses. Also it is assumed here that production of hydrogen does not commence until the battolyser  
522 is fully charged, as in [17]. This is a simplification, and a more accurate model of hydrogen production  
523 might impact the case for the battolyser. It would also be desirable to conduct a full LCA for the  
524 battolyser, for a more accurate understanding of its environmental impacts.

#### 525 5. Conclusions

526

527 This study considered a battolyser for the production of hydrogen for cleaner cooking (“hCooking”) in  
528 sub-Saharan Africa. The battolyser was compared to electric cooking options (“eCooking”) and to the  
529 status quo using charcoal. Multi-objective optimisation was employed to assess the payoff between  
530 lifetime greenhouse gas emissions and cost. The baseline case with charcoal was shown to result in  
531 lifetime emissions of 74.8 tCO<sub>2e</sub> per household over 20 years, and annualised cost \$213 per household.  
532 Results show that a battolyser system could eliminate 95.6% of lifetime CO<sub>2</sub> emissions when compared  
533 with a baseline using charcoal, at an annualised cost of \$507 per household. However, eCooking  
534 systems appear superior to the battolyser, with the cleanest battery + eCook system achieving 95.8%  
535 emissions reduction at annualised cost \$422 / household. eCooking systems are generally Pareto  
536 dominant over hCooking systems, including under a realistic range of sensitivity scenarios. The  
537 preference for eCooking arises mainly from its inherently superior efficiency, versus cooking over a  
538 flame. If the efficiency of hydrogen burners can be increased it will greatly benefit the case for the  
539 battolyser. Increasing the lifetime of the battolyser, thus reducing the number of required cell  
540 replacements, should be another priority to improve competitiveness; the battolyser will also benefit from  
541 cheaper PV systems.

542 Encouragingly, eCooking with PV and diesel plus continuing use of some charcoal appears to be the  
543 cheapest possible way to cook. Such a system will curtail 60% of GHG emissions over that timeframe,  
544 whilst actually reducing annualised cost to \$205 / household. Reducing the use of charcoal further and  
545 adding battery storage can all but eliminate GHG emissions but is more costly. However, supposing a  
546 higher battery cycle life of 3000 could be attained, 97.5% emissions reductions could be achieved for  
547 annualised cost \$269 per household, close to the baseline costs. It is important to note that cleaner  
548 cooking can lead to multiple benefits beyond GHG curtailment, notably improved air quality.

549 These results suggest that the priorities for both government policy and academic research should reflect  
550 that eCooking is the front-runner for cleaner cooking in sub-Saharan Africa. Nonetheless, hCooking  
551 may find its niche, and research should continue to address the difficulties with cost and efficiency.

## 552 Acknowledgements

553

554 We would like to thank Hannah Mottram and the Mpale village microgrid for providing electrical  
555 load data used in this study.

556 The authors from Loughborough would like to thank the EU for co-funding parts of this work under  
557 project LoCEL-H2.

558 References

559

560 [1] C. Philibert, “Power to the Cooks! New Clean Cooking Opportunities for Sustainable  
561 Development in Sub-Saharan Africa,” 2022. [Online]. Available:  
562 [https://www.ifri.org/sites/default/files/atoms/files/philibert\\_power\\_to\\_the\\_cooks\\_2022.pdf](https://www.ifri.org/sites/default/files/atoms/files/philibert_power_to_the_cooks_2022.pdf).

563 [2] M. Leach *et al.*, “Modelling the costs and benefits of moving to Modern Energy Cooking  
564 Services-methods & application to three case studies Working Paper 29 th April 2021,” 2021.  
565 [Online]. Available: [www.mecs.org.uk](http://www.mecs.org.uk).

566 [3] N. Scott and M. Leach, “Comparing energy consumption and costs – from cooking across the  
567 MECS programme,” 2022. [Online]. Available: [https://mecs.org.uk/wp-](https://mecs.org.uk/wp-content/uploads/2022/04/Comparing-energy-consumption-and-costs—from-cooking-across-the-MECS-programme.pdf)  
568 [content/uploads/2022/04/Comparing-energy-consumption-and-costs—from-cooking-across-](https://mecs.org.uk/wp-content/uploads/2022/04/Comparing-energy-consumption-and-costs—from-cooking-across-the-MECS-programme.pdf)  
569 [the-MECS-programme.pdf](https://mecs.org.uk/wp-content/uploads/2022/04/Comparing-energy-consumption-and-costs—from-cooking-across-the-MECS-programme.pdf).

570 [4] F. Antonanzas-Torres, R. Urraca, C. A. C. Guerrero, and J. Blanco-Fernandez, “Solar E-  
571 Cooking with Low-Power Solar Home Systems for Sub-Saharan Africa,” *Sustainability*, vol. 13,  
572 no. 21, p. 12241, Nov. 2021, doi: 10.3390/su132112241.

573 [5] F. Lombardi, F. Riva, M. Sacchi, and E. Colombo, “Enabling combined access to electricity and  
574 clean cooking with PV-microgrids: new evidences from a high-resolution model of cooking  
575 loads,” *Energy Sustain. Dev.*, vol. 49, pp. 78–88, Apr. 2019, doi: 10.1016/j.esd.2019.01.005.

576 [6] MECS, “MECS Modern Energy Cooking Services,” *mecs.org.uk*, 2023. <https://mecs.org.uk/>.

577 [7] ESMAP, “Cooking Electricity With a Cost Perspective,” 2020. [Online]. Available:  
578 [https://documents1.worldbank.org/curated/en/920661600750772102/pdf/Cooking-with-](https://documents1.worldbank.org/curated/en/920661600750772102/pdf/Cooking-with-Electricity-A-Cost-Perspective.pdf)  
579 [Electricity-A-Cost-Perspective.pdf](https://documents1.worldbank.org/curated/en/920661600750772102/pdf/Cooking-with-Electricity-A-Cost-Perspective.pdf).

580 [8] R. Van Buskirk, L. Kachione, G. Robert, R. Kanyerere, C. Gilbert, and J. Majoni, “How to Make  
581 Off-Grid Solar Electric Cooking Cheaper Than Wood-Based Cooking,” *Energies*, vol. 14, no.  
582 14, p. 4293, Jul. 2021, doi: 10.3390/en14144293.

583 [9] S. Batchelor, E. Brown, J. Leary, N. Scott, A. Alsop, and M. Leach, “Solar electric cooking in  
584 Africa: Where will the transition happen first?,” *Energy Res. Soc. Sci.*, vol. 40, pp. 257–272,  
585 Jun. 2018, doi: 10.1016/j.erss.2018.01.019.

586 [10] E. Rivard, M. Trudeau, and K. Zaghbi, “Hydrogen storage for mobility: A review,” *Materials*  
587 *(Basel)*, vol. 12, no. 12, 2019, doi: 10.3390/ma12121973.

588 [11] D. Steward *et al.*, “Lifecycle Cost Analysis of Hydrogen Versus Other Technologies for  
589 Electrical Energy Storage Lifecycle Cost Analysis of Hydrogen Versus Other Technologies for  
590 Electrical Energy Storage,” no. November, 2009.

591 [12] B. D. James, C. Houchins, J. M. Huya-Kouadio, and D. A. Desantis, “Final Report: Hydrogen  
592 Storage System Cost Analysis,” no. September, pp. 1–54, 2016.

593 [13] N. Schöne, R. Dumitrescu, and B. Heinz, “Techno-Economic Evaluation of Hydrogen-Based  
594 Cooking Solutions in Remote African Communities—The Case of Kenya,” *Energies*, vol. 16,  
595 no. 7, p. 3242, Apr. 2023, doi: 10.3390/en16073242.

596 [14] E. Topriská, M. Kolokotroni, Z. Dehouche, D. T. Novieto, and E. A. Wilson, “The potential to  
597 generate solar hydrogen for cooking applications: Case studies of Ghana, Jamaica and  
598 Indonesia,” *Renew. Energy*, vol. 95, pp. 495–509, Sep. 2016, doi: 10.1016/j.renene.2016.04.060.

599 [15] J. Leary, N. Scott, N. Serenje, F. Mwila, and S. Batchelor, “Opportunities & Challenges for  
600 eCook Zambia,” 2019. [Online]. Available: [https://mecs.org.uk/wp-](https://mecs.org.uk/wp-content/uploads/2020/12/eCook-Zambia-Country-Working-Paper-2-11-19-)  
601 [content/uploads/2020/12/eCook-Zambia-Country-Working-Paper-2-11-19-](https://mecs.org.uk/wp-content/uploads/2020/12/eCook-Zambia-Country-Working-Paper-2-11-19-)



- 602 COMPRESSED.pdf.
- 603 [16] Malawi Ministry of Energy, “Malawi eCooking roadmap,” 2024. [Online]. Available:  
604 [https://mecs.org.uk/wp-content/uploads/2024/04/Malawi-eCooking-Roadmap-Digital-Version-](https://mecs.org.uk/wp-content/uploads/2024/04/Malawi-eCooking-Roadmap-Digital-Version-V9.pdf)  
605 [V9.pdf](https://mecs.org.uk/wp-content/uploads/2024/04/Malawi-eCooking-Roadmap-Digital-Version-V9.pdf).
- 606 [17] B. Jenkins *et al.*, “Techno-Economic Analysis of Low Carbon Hydrogen Production from  
607 Offshore Wind Using Battolyser Technology,” *Energies*, vol. 15, no. 16, p. 5796, Aug. 2022,  
608 doi: 10.3390/en15165796.
- 609 [18] F. M. Mulder, B. M. H. Weninger, J. Middelkoop, F. G. B. Ooms, and H. Schreuders, “Efficient  
610 electricity storage with a battolyser, an integrated Ni–Fe battery and electrolyser,” *Energy*  
611 *Environ. Sci.*, vol. 10, no. 3, pp. 756–764, 2017, doi: 10.1039/C6EE02923J.
- 612 [19] M. Brenton, J. Barton, D. Strickland, J. Wilson, and U. Wijayantha-Kahagala, “Lead-acid  
613 battolyser concept,” in *11th International Conference on Power Electronics, Machines and*  
614 *Drives (PEMD 2022)*, 2022, pp. 64–70, doi: 10.1049/icp.2022.1018.
- 615 [20] H. Wagener, A. J. M. van Wijk, F. M. Mulder, and M. B. Zaaijer, “A future techno-economic  
616 evaluation of an offshore wind hydrogen system with battolyser technology on the Dogger  
617 Bank,” *Delft University of Technology*, 2023.  
618 [https://repository.tudelft.nl/islandora/object/uuid%3Aa4ef75d8-19d4-4ae8-9397-](https://repository.tudelft.nl/islandora/object/uuid%3Aa4ef75d8-19d4-4ae8-9397-75f785911158)  
619 [75f785911158](https://repository.tudelft.nl/islandora/object/uuid%3Aa4ef75d8-19d4-4ae8-9397-75f785911158).
- 620 [21] The AnyLogic Company, “AnyLogic,” 2019. <https://www.anylogic.com/>.
- 621 [22] OptTek Systems Inc., “OptQuest,” 2019. .
- 622 [23] J. Martínez-Gómez, D. Ibarra, S. Villacis, P. Cuji, and P. R. Cruz, “Analysis of LPG, electric  
623 and induction cookers during cooking typical Ecuadorian dishes into the national efficient  
624 cooking program,” *Food Policy*, vol. 59, pp. 88–102, Feb. 2016, doi:  
625 10.1016/j.foodpol.2015.12.010.
- 626 [24] M. Sweeney, J. Dols, B. Fortenbery, and F. Sharp, “Induction Cooking Technology Design and  
627 Assessment,” in *ACEEE Summer Study on Energy Efficiency in Buildings*, 2013.
- 628 [25] J. Leary, N. Scott, N. Serenje, F. Mwila, and S. Batchelor, “eCook Zambia Cooking Diaries –  
629 October 2019 Working Paper,” 2019. [Online]. Available: [https://mecs.org.uk/wp-](https://mecs.org.uk/wp-content/uploads/2020/12/eCook-Zambia-Cooking-Diaries-Report-JL-13-10-19-COMPRESSED.pdf)  
630 [content/uploads/2020/12/eCook-Zambia-Cooking-Diaries-Report-JL-13-10-19-](https://mecs.org.uk/wp-content/uploads/2020/12/eCook-Zambia-Cooking-Diaries-Report-JL-13-10-19-COMPRESSED.pdf)  
631 [COMPRESSED.pdf](https://mecs.org.uk/wp-content/uploads/2020/12/eCook-Zambia-Cooking-Diaries-Report-JL-13-10-19-COMPRESSED.pdf).
- 632 [26] T. D. Hutty, S. Dong, and S. Brown, “Suitability of energy storage with reversible solid oxide  
633 cells for microgrid applications,” *Energy Convers. Manag.*, vol. 226, p. 113499, Dec. 2020, doi:  
634 10.1016/j.enconman.2020.113499.
- 635 [27] Sandia National Laboratories, “Sandia Module Temperature Model,” [sandia.gov](https://pvpmc.sandia.gov/modeling-steps/2-dc-module-iv/module-temperature/sandia-module-temperature-model/).  
636 [https://pvpmc.sandia.gov/modeling-steps/2-dc-module-iv/module-temperature/sandia-module-](https://pvpmc.sandia.gov/modeling-steps/2-dc-module-iv/module-temperature/sandia-module-temperature-model/)  
637 [temperature-model/](https://pvpmc.sandia.gov/modeling-steps/2-dc-module-iv/module-temperature/sandia-module-temperature-model/).
- 638 [28] K. Mongird, V. Viswanathan, J. Alam, C. Vartanian, V. Sprenkle, and R. Baxter, “2020 Grid  
639 Energy Storage Technology Cost and Performance Assessment,” 2020. [Online]. Available:  
640 [https://www.pnnl.gov/sites/default/files/media/file/PSH\\_Methodology\\_0.pdf](https://www.pnnl.gov/sites/default/files/media/file/PSH_Methodology_0.pdf).
- 641 [29] Greentech Renewables, “How does Depth of Discharge factor into Grid Connected battery  
642 systems?,” [greentechrenewables.com](https://www.greentechrenewables.com), 2024.  
643 [https://www.greentechrenewables.com/article/how-does-depth-discharge-factor-grid-](https://www.greentechrenewables.com/article/how-does-depth-discharge-factor-grid-connected-battery-systems)  
644 [connected-battery-systems](https://www.greentechrenewables.com/article/how-does-depth-discharge-factor-grid-connected-battery-systems).
- 645 [30] Battery University, “BU-403: Charging Lead Acid,” [batteryuniversity.com](https://batteryuniversity.com), 2023.  
646 <https://batteryuniversity.com/article/bu-403-charging-lead-acid>.

- 647 [31] Climatescope, “Zambia,” 2024. <https://www.global-climatescope.org/markets/zm/>.
- 648 [32] K. Walsh, R. Theron, A. Seedat, and C. Reeders, “Estimating the economic cost of load shedding  
649 in South Africa,” 2020. [Online]. Available: [https://www.nersa.org.za/wp-](https://www.nersa.org.za/wp-content/uploads/2021/09/Appendix-C_Estimating-the-Economic-Cost-of-Load-Shedding-in-South-Africa-Report.pdf)  
650 [content/uploads/2021/09/Appendix-C\\_Estimating-the-Economic-Cost-of-Load-Shedding-in-](https://www.nersa.org.za/wp-content/uploads/2021/09/Appendix-C_Estimating-the-Economic-Cost-of-Load-Shedding-in-South-Africa-Report.pdf)  
651 [South-Africa-Report.pdf](https://www.nersa.org.za/wp-content/uploads/2021/09/Appendix-C_Estimating-the-Economic-Cost-of-Load-Shedding-in-South-Africa-Report.pdf).
- 652 [33] F. C. Robert, G. S. Sisodia, and S. Gopalan, “Sustainable trade-off between reliability and  
653 electricity prices for geographically isolated communities,” *Energy Reports*, vol. 5, pp. 1399–  
654 1407, Nov. 2019, doi: 10.1016/j.egy.2019.09.064.
- 655 [34] LoCEL-H2, “LoCEL-H2,” *locelh2.org*, 2023. <https://locelh2.org/>.
- 656 [35] IRENA, “Solar PV in Africa - costs and markets,” 2016. [Online]. Available:  
657 [https://www.irena.org/-](https://www.irena.org/-/media/Files/IRENA/Agency/Publication/2016/IRENA_Solar_PV_Costs_Africa_2016.pdf)  
658 [/media/Files/IRENA/Agency/Publication/2016/IRENA\\_Solar\\_PV\\_Costs\\_Africa\\_2016.pdf](https://www.irena.org/-/media/Files/IRENA/Agency/Publication/2016/IRENA_Solar_PV_Costs_Africa_2016.pdf).
- 659 [36] J. M. Hansen and G. A. Xydis, “Rural electrification in Kenya: a useful case for remote areas in  
660 sub-Saharan Africa,” *Energy Effic.*, vol. 13, no. 2, pp. 257–272, Feb. 2020, doi: 10.1007/s12053-  
661 018-9756-z.
- 662 [37] A. Okunlola, O. Evbuomwan, H. Zaheer, and J. Winklmaier, “Assessment of Decentralized  
663 Hybrid Mini-grids in Sub-Saharan Africa: Market Analysis, Least-Cost Modelling, and Job  
664 Creation Analysis,” 2018, pp. 21–34.
- 665 [38] S. Keddar, S. Strachan, B. Soltowski, and S. Galloway, “An Overview of the Technical  
666 Challenges Facing the Deployment of Electric Cooking on Hybrid PV/Diesel Mini-Grid in Rural  
667 Tanzania—A Case Study Simulation,” *Energies*, vol. 14, no. 13, p. 3761, Jun. 2021, doi:  
668 10.3390/en14133761.
- 669 [39] J. Leary and B. Onjala, “Is Electricity Really too Expensive for Cooking?,” *mecs.org.uk*, 2022.  
670 <https://mecs.org.uk/blog/is-electricity-really-too-expensive-for-cooking/>.
- 671 [40] J. Leary and J. F. Todd, *The Kenya eCookbook*. 2019.
- 672 [41] R. H. Wisner, M. Bolinger, and J. Seel, “Benchmarking Utility-Scale PV Operational Expenses  
673 and Project Lifetimes: Results from a Survey of U.S. Solar Industry Professionals,” *Electricity*  
674 *Markets and Policy*, 2020. <https://emp.lbl.gov/publications/benchmarking-utility-scale-pv>.
- 675 [42] J. Gorre, F. Ruoss, H. Karjunen, J. Schaffert, and T. Tynjälä, “Cost benefits of optimizing  
676 hydrogen storage and methanation capacities for Power-to-Gas plants in dynamic operation,”  
677 *Appl. Energy*, vol. 257, no. August 2019, 2020, doi: 10.1016/j.apenergy.2019.113967.
- 678 [43] I. Dincer and C. Acar, “Review and evaluation of hydrogen production methods for better  
679 sustainability,” *Int. J. Hydrogen Energy*, vol. 40, no. 34, pp. 11094–11111, 2014, doi:  
680 10.1016/j.ijhydene.2014.12.035.
- 681 [44] K. Mongird *et al.*, “Energy Storage Technology and Cost Characterization Report | Department  
682 of Energy,” no. July, 2019.
- 683 [45] A. González-García, P. Ciller, S. Lee, R. Palacios, F. de Cuadra García, and J. I. Pérez-Arriaga,  
684 “A Rising Role for Decentralized Solar Minigrids in Integrated Rural Electrification Planning?  
685 Large-Scale, Least-Cost, and Customer-Wise Design of Grid and Off-Grid Supply Systems in  
686 Uganda,” *Energies*, vol. 15, no. 13, p. 4517, Jun. 2022, doi: 10.3390/en15134517.
- 687 [46] T. Reber, S. Booth, D. Cutler, X. Li, and J. Salasovich, “TARIFF CONSIDERATIONS FOR  
688 MICRO-GRIDS IN SUB-SAHARAN AFRICA,” 2018. [Online]. Available:  
689 <https://www.nrel.gov/docs/fy18osti/69044.pdf>.
- 690 [47] GET.invest, “Zambia: Solar PV and Hydro Mini-Grids,” Brussels, 2019. [Online]. Available:  
691 <https://www.get-invest.eu/wp-content/uploads/2020/10/GETinvest-Market->

- 692 Insights\_ZMB\_Mini-grid\_-CS-Solar\_2019-1.pdf.
- 693 [48] S. Weber, J. F. Peters, M. Baumann, and M. Weil, “Life Cycle Assessment of a Vanadium Redox  
694 Flow Battery,” *Environ. Sci. Technol.*, vol. 52, no. 18, pp. 10864–10873, Sep. 2018, doi:  
695 10.1021/acs.est.8b02073.
- 696 [49] E. Shittu *et al.*, “Life cycle assessment of soluble lead redox flow battery,” *J. Clean. Prod.*, vol.  
697 337, p. 130503, Feb. 2022, doi: 10.1016/j.jclepro.2022.130503.
- 698 [50] The Renewable Energy Hub UK, “SOLAR PHOTOVOLTAICS – CRADLE-TO-GRAVE  
699 ANALYSIS AND ENVIRONMENTAL COST.,” *renewableenergyhub.co.uk*, 2018.  
700 <https://renewableenergyhub.co.uk/main/solar-panels/solar-panels-carbon-analysis/>.
- 701 [51] A. Louwen, W. G. J. H. M. van Sark, A. P. C. Faaij, and R. E. I. Schropp, “Re-assessment of  
702 net energy production and greenhouse gas emissions avoidance after 40 years of photovoltaics  
703 development,” *Nat. Commun.*, vol. 7, no. 1, p. 13728, Dec. 2016, doi: 10.1038/ncomms13728.
- 704 [52] G. Wernet, C. Bauer, B. Steubing, J. Reinhard, E. Moreno-Ruiz, and B. Weidema, “The  
705 ecoinvent database version 3 (part I): overview and methodology,” *Int. J. Life Cycle Assess.*,  
706 vol. 21, no. 9, pp. 1218–1230, Sep. 2016, doi: 10.1007/s11367-016-1087-8.
- 707 [53] A. A. Siteo, “Charcoal, carbon emissions, and international conventions/protocols,” Maputo,  
708 2012. [Online]. Available: [https://energypedia.info/images/4/4a/EN-Charcoal%2C\\_carbon\\_emissions\\_and\\_international\\_onventions%3Bprotocols-Almeida\\_A.\\_Siteo.pdf](https://energypedia.info/images/4/4a/EN-Charcoal%2C_carbon_emissions_and_international_onventions%3Bprotocols-Almeida_A._Siteo.pdf).
- 711 [54] M. A. Elsayed, R. Matthews, and N. Mortimer, *Carbon and Energy Balances for a Range of  
712 Biofuels Options*. 2003.
- 713 [55] Solcast, “Solar data services... in the cloud,” *solcast.com*. [solcast.com](https://solcast.com).
- 714 [56] Alliance for Rural Electrification, “Studer Innotec - Electrification of the Mpale village  
715 (Tanzania),” *ruralelec.org*. <https://www.ruralelec.org/project-case-studies/studer-innotec-electrification-mpale-village-tanzania>.
- 717 [57] CEIC Data, “Zambia Monthly Earnings,” *ceicdata.com*, 2021.  
718 <https://www.ceicdata.com/en/indicator/zambia/monthly-earnings>.
- 719 [58] W. Zhang, Y. Wang, J. Wang, Z. Zhang, and Z. Wang, “Reducing kitchen gas consumption by  
720 designing a heat gathering shield with guide rings for a domestic gas stove,” *Energy Build.*, vol.  
721 296, p. 113384, Oct. 2023, doi: 10.1016/j.enbuild.2023.113384.
- 722 [59] wind-turbine-models.com, “Bonus B23/150 Gittermast,” *wind-turbine-models.com*, 2011.  
723 <https://en.wind-turbine-models.com/turbines/189-bonus-b23-150-gittermast>.
- 724 [60] S. Whittaker, “Exploring Africa’s untapped wind potential,” *Global Wind Energy Council*,  
725 2020. <https://gwec.net/wp-content/uploads/2021/04/IFC-Africa-Wind-Technical-Potential-Oct-2020-1.pdf>.

727

728